TECHNICAL DATASHEET

VESNA HR – HOT REGION MF75D26L

ORDER INFORMATION

TAB ID
615870

Short Code
MF75D26L

DIN Marking

EAN Code
3838807041738

Quantity per EU/CNT pallet
0/120 pcs

TECHNICAL INFORMATION

Voltage (V)
12

Capacity C20 (Ah)
70

CCA -18°C EN (A)
520

RC (min)
120

LxWxH (mm)
259x175x200/221

Total Weight (kg)
16.7

TECHNOLOGY

Primary Function
Engine Start

Battery Technology
Flooded

Grid Type (pos/neg)
Expanded/Concasted

Grid Alloy (pos/neg)
Ca/Ca

Separator
PE

Electrolyte (g/cm3)
1,28

BOX DESIGN

Box Type
D26

Cover Type
SMF


Colour
Black

Layout
0


BHD
B1

Terminal
1

DRAWING

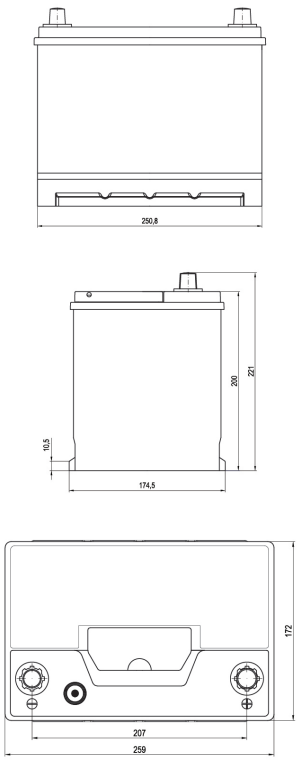


BHD




LAYOUT

0

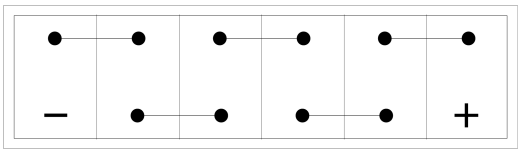

TERMINAL

1

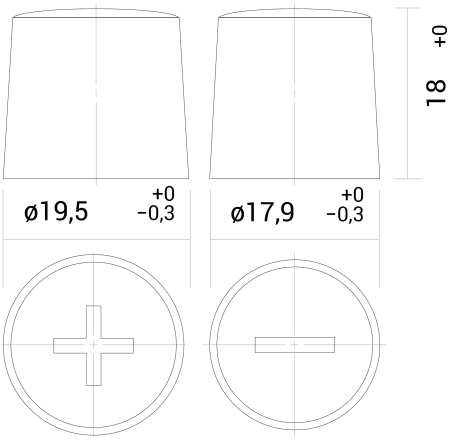

TECHNICAL DATASHEET

VESNA HR – HOT REGION MF75D26L

TAB d.d, Polena 6, SI-2392 Mežica, Slovenia, www.tab.si