TECHNICAL DATASHEET

TOPLA HR - HOT REGION L3 AGM

ORDER INFORMATION

TAB ID

Short Code
L3 AGM

DIN Marking

EAN Code
3838807046771

Quantity per EU/CNT pallet
0/90 pcs

TECHNICAL INFORMATION

Voltage (V)
12

Capacity C20 (Ah)
70

CCA -18°C EN (A)
760

RC (min)
130

LxWxH (mm)
278x175x190

Total Weight (kg)
20.5

TECHNOLOGY

Primary Function
Advanced Start/Stop Functionality

Battery Technology
AGM - Absorbent Glass Mat

Grid Type (pos/neg)
Casted/Concasted

Grid Alloy (pos/neg)
Ca/Ca

Separator
GM

Electrolyte (g/cm3)
1,3

BOX DESIGN

Box Type
L3

Cover Type
Sealed


Colour
Black


Layout
0


BHD
B13

Terminal
1


DRAWING

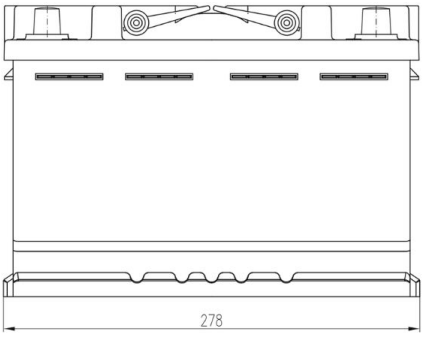

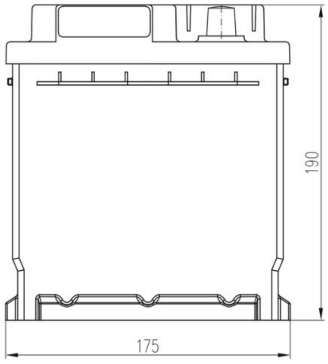

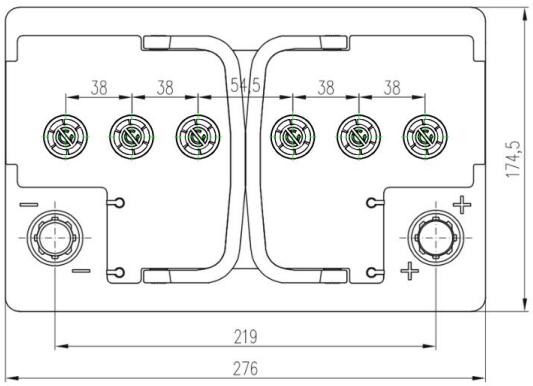


BHD




LAYOUT

0

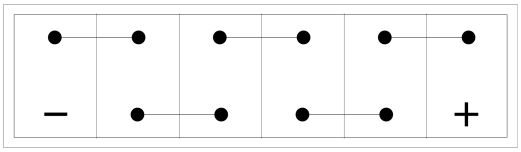

TERMINAL

1

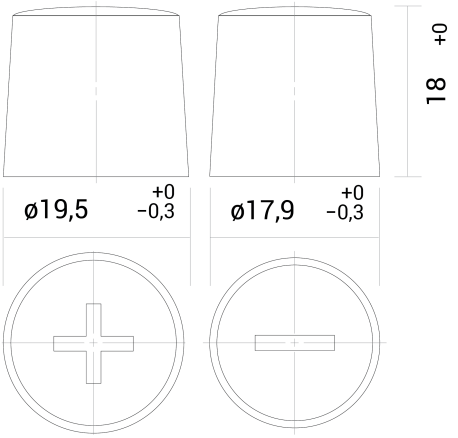

TECHNICAL DATASHEET

TOPLA HR - HOT REGION L3 AGM

TAB d.d, Polena 6, SI-2392 Mežica, Slovenia, www.tab.si