TECHNICAL DATASHEET

TOPLA HR - HOT REGION MF40B19R

ORDER INFORMATION

TAB ID

Short Code
MF40B19R

DIN Marking

EAN Code
3838807046115

Quantity per EU/CNT pallet
0/224 pcs

TECHNICAL INFORMATION

Voltage (V)
12

Capacity C20 (Ah)
35

CCA -18°C EN (A)
270

RC (min)
53

LxWxH (mm)
196x128x202/223

Total Weight (kg)
9.4

TECHNOLOGY

Primary Function
Engine Start

Battery Technology
Flooded

Grid Type (pos/neg)
Expanded/Concasted

Grid Alloy (pos/neg)
Ca/Ca

Separator
PE

Electrolyte (g/cm3)
1,28

BOX DESIGN

Box Type
B19

Cover Type
SMF


Colour
Black

Layout
1

BHD
B0

Terminal
3

DRAWING

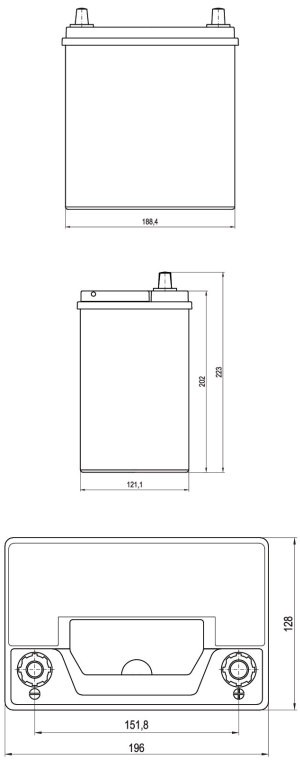


BHD

B 0




LAYOUT

1

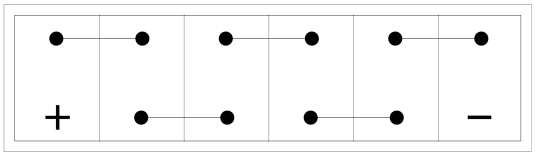

TERMINAL

3

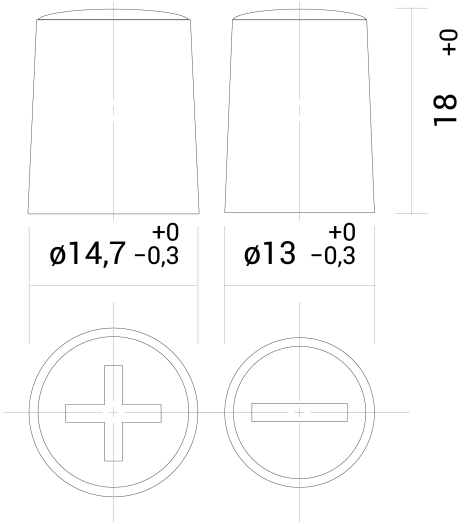

TECHNICAL DATASHEET

TOPLA HR - HOT REGION MF40B19R

TAB d.d, Polena 6, SI-2392 Mežica, Slovenia, www.tab.si