




e.leisure



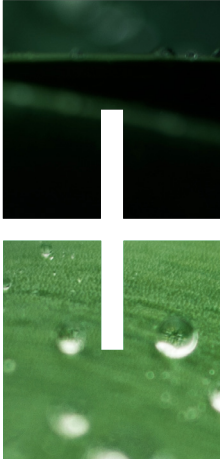

TAB E.LEISURE

TAB e.leisure batteries are ideal for applications where long lifespan, light weight, higher power, fast charging, and safety are the key. They can be used in a variety of stationary and motive power applications.

Batteries are protected against overcharging, deep discharging, overheating, overcurrent protection and can be straight-forward replacement for most other technology batteries.

e.leisure app



MAIN FEATURES



- **LONGER CYCLE LIFE:** Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership .
- **LIGHTER WEIGHT:** About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.
- **HIGHER POWER:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.
- **WIDER TEMPERATURE RANGE:** -20°C~ 60°C.
- **SUPERIOR SAFETY:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

APPLICATION



- Solar & storage systems
- UPS, back up power
- Telecommunications
- Lightning
- Golf Cars
- Wheelchairs
- Toys
- Marine and RV
- Cleaning Machines



FEATURES



SAFETY

- Non-explosive and non-combustible.
- Additional safety layer with BMS.
- CE and UN 38.3 approved.



PERFORMANCE DATA

- 100% capacity available.
- High discharge/charge currents.
- Full power available throughout discharge with stable discharge voltage and lower internal resistance.



USAGE DATA

- Long shelf life.
- Rechargeable with max current.
- Increased energy density due to more efficient packing.



EFFICIENCY

- Highly efficient charging.
- More efficient operation at low temperatures.
- Plug and play charge and discharge.




ENVIRONMENT

- Does not contain any acid or heavy metals such as lead, cadmium, or mercury.
- No gas emitted.



CHEMISTRY

- High power performance: When discharging, the battery will have constant power through 85% of SOC.
- Extremely safe and stable chemistry.
- Long service life: Up to 10 years, and up to 2.000 – 4.000 cycles (under 80% DOD).
- No memory effect.

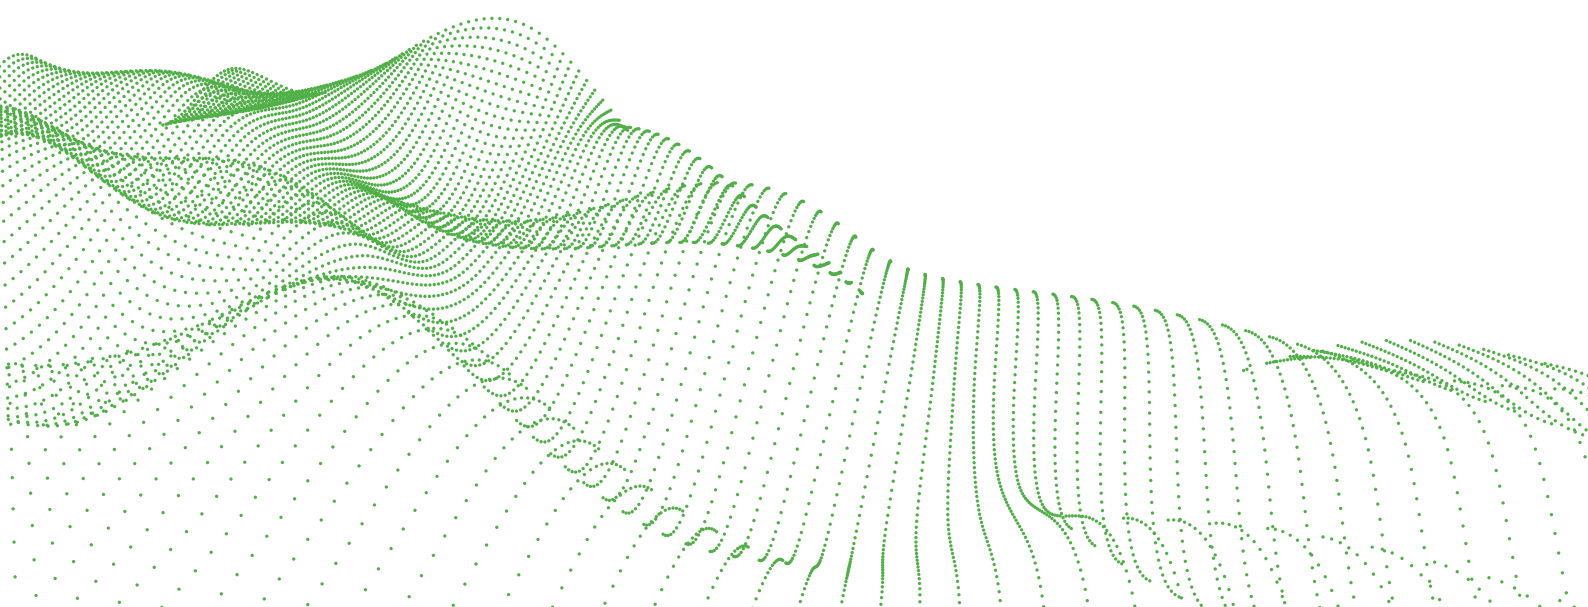




e.leisure

PREMIUM

- design life: 15 years
- cycle life: 4.000 cycles with 80% DOD
- good vibration resistance
- good thermal cycling resistance
- user friendly
- allows high charge/discharge currents
- battery cell: 3C rate
- easy battery handling
- self-discharge: <1%

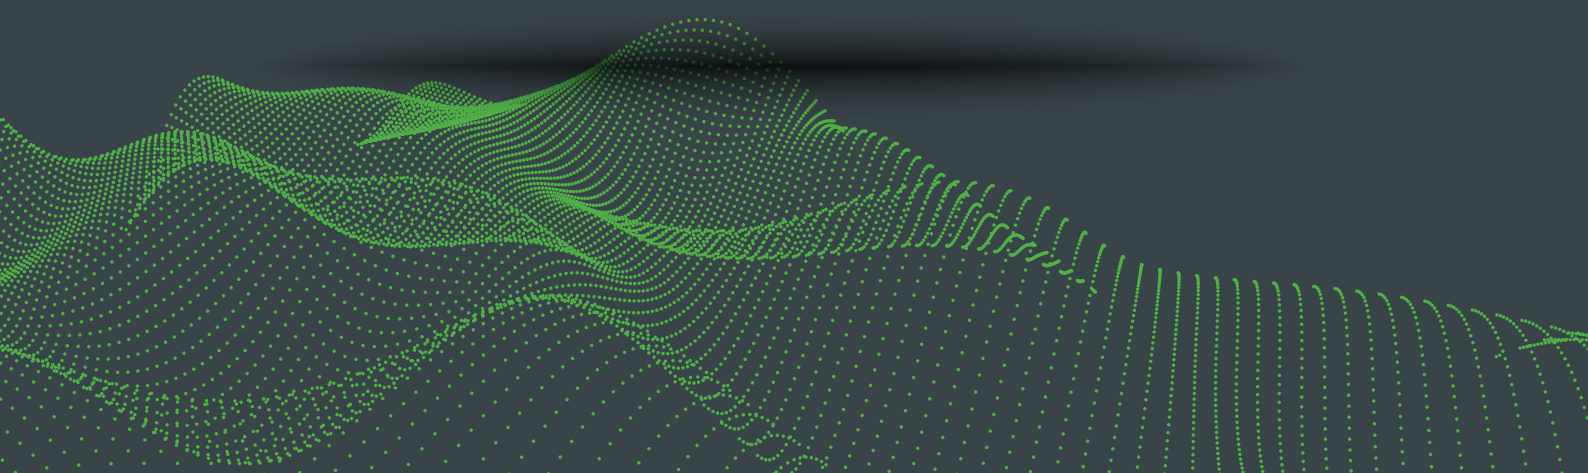

TAB E LEISURE PREMIUM

Code	V	Ah	Wh	Dimensions (mm)			Weight	Terminal
				L	W	H	Kg	
HD 12-4,5 P	12,8	4,5	57,6	90	70	106	0,8	F1
HD 12-7,5 P	12,8	7,5	96	152	65	95	1,1	F1
HD 12-10 P	12,8	10	128	152	100	95	1,2	F1
HD 12-20 P	12,8	20	256	181	77	168	2,4	M5
HD 12-45 P	12,8	45	576	197	165	170	5,7	M6
HD 12-50 P	12,8	50	640	228	140	215	6,8	M6
HD 12-60 P	12,8	60	768	228	138	228	7,9	M6
HD 12-65 P	12,8	65	832	260	168	210	8,1	M6
HD 12-75 P	12,8	75	960	260	168	210	8,8	M6
HD 12-80 P	12,8	80	1024	260	168	210	9,2	M6
HD 12-100 P	12,8	100	1280	330	173	212	11,6	M8
HD 12-100 P(L)*	12,8	100	1280	335	175	195	11,6	M8
HD 12-100 P(R)**	12,8	100	1280	335	175	190	11,2	M8
HD 12-120 P	12,8	120	1536	410	175	225	13,6	M8
HD 12-150 P	12,8	150	1920	483	170	238	17,6	M8
HD 12-200 P	12,8	200	2560	522	240	224	23,5	M8
HD 12-250 P	12,8	250	3200	522	240	224	27,8	M8
HD 12-300 P	12,8	300	3840	522	240	224	32,5	M8
HD 24-6 P	25,6	6	153,6	152	99	96	1,7	F2
HD 24-10 P	25,6	10	256	181	77	167	2,8	M5
HD 24-20 P	25,6	20	512	195	130	180	4,8	M5
HD 24-50 P	25,6	50	1280	330	173	212	12,5	M8
HD 24-75 P	25,6	75	1920	483	170	238	17,6	M8
HD 24-100 P	25,6	100	2560	522	240	224	22,7	M8
HD 24-125 P	25,6	125	3200	522	240	224	29,6	M8
HD 24-150 P	25,6	150	3840	522	240	224	32,5	M8

*L=Low box, **R=for RV



e.leisure

CLEVER


- design life: 10 years
- cycle life: 2.000 cycles with 80% DOD
- good vibration resistance
- good volume efficiency
- allows high charge/discharge currents
- good price efficiency
- battery cell: 1C rate
- user friendly
- self-discharge: <1%



TAB E.LEISURE CLEVER

Code	V	Ah	Wh	Dimensions (mm)			Weight	
				L	W	H	Kg	Terminal
HD 12-50 C	12,8	50	640	228	140	215	6,8	M6
HD 12-65 C	12,8	65	832	260	168	210	8,1	M6
HD 12-75 C	12,8	75	960	260	168	210	8,8	M6
HD 12-80 C	12,8	80	1024	260	168	210	9,2	M6
HD 12-100 C	12,8	100	1280	330	173	212	11,6	M8
HD 12-100 C(L)*	12,8	100	1280	335	175	195	11,6	M8
HD 12-120 C	12,8	120	1536	410	175	225	13,6	M8
HD 12-150 C	12,8	150	1920	483	170	238	17,6	M8
HD 12-200 C	12,8	200	2560	522	240	224	23,5	M8
HD 12-250 C	12,8	250	3200	522	240	224	27,8	M8
HD 12-300 C	12,8	300	3840	522	240	224	32,5	M8
HD 24-50 C	25,6	50	1280	330	173	212	12,5	M8
HD 24-75 C	25,6	75	1920	483	170	238	17,6	M8
HD 24-100 C	25,6	100	2560	522	240	224	22,7	M8
HD 24-150 C	25,6	150	3840	522	240	224	32,5	M8


*L=Low box

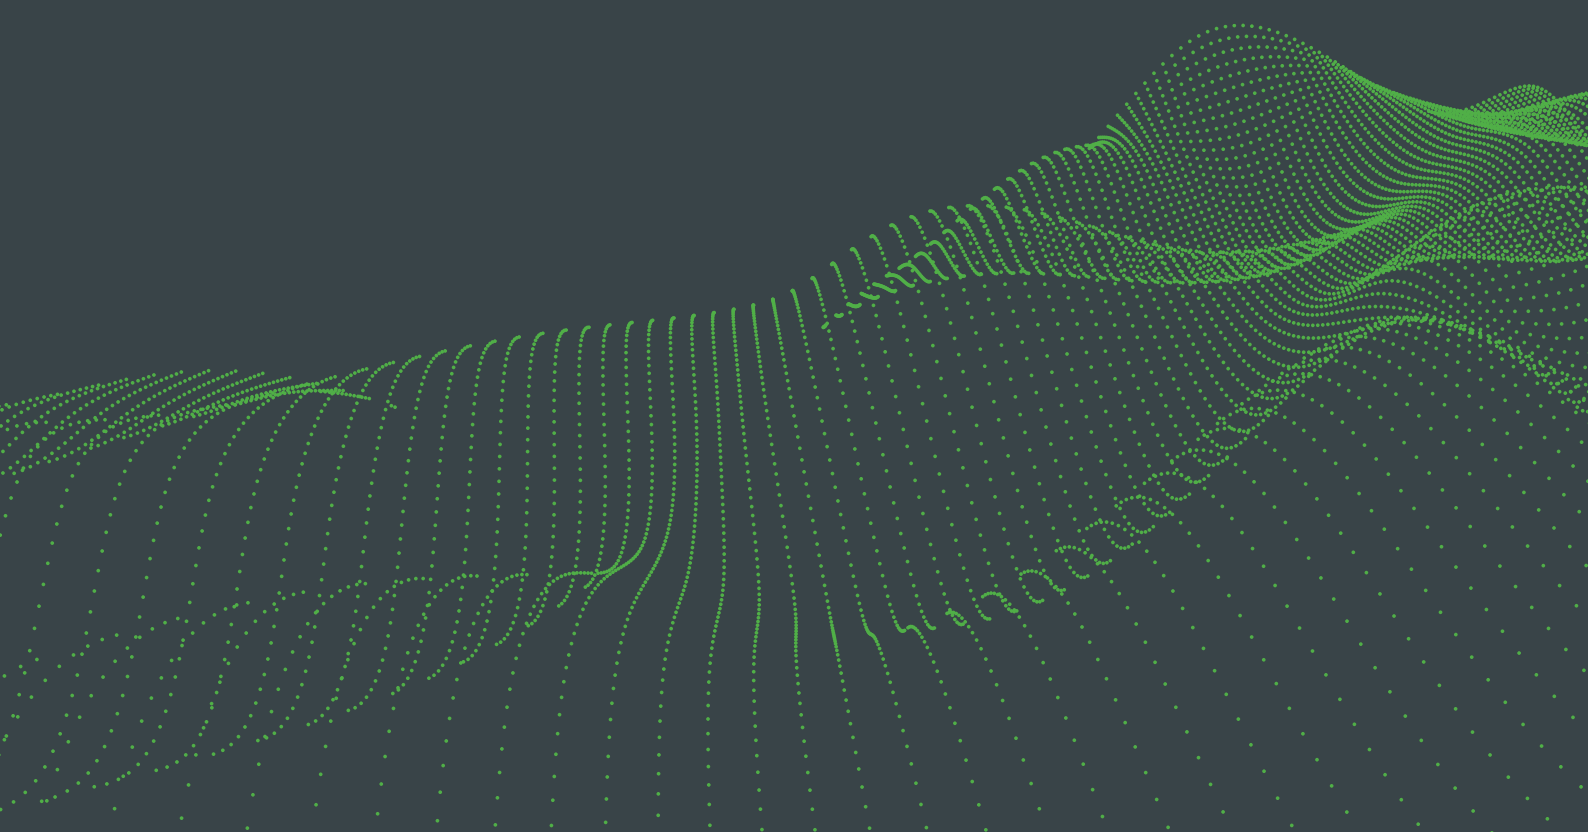



CONNECTING THE BATTERY

Use an appropriate wire for the connection wires to ensure no overheating or unnecessary losses occur. Use appropriate fuses matching the wires and load.

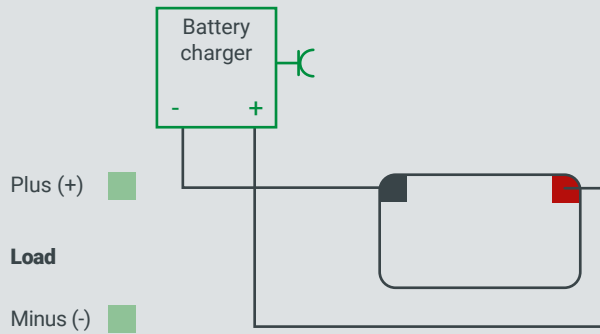


CHARGING

Rechargeable with max current.

CONNECTING IN SERIES AND PARALLEL

The maximum number of batteries in parallel is 20pcs and the maximum number of batteries in series is 4pcs. To divide the current equally among batteries, use the schematic below.

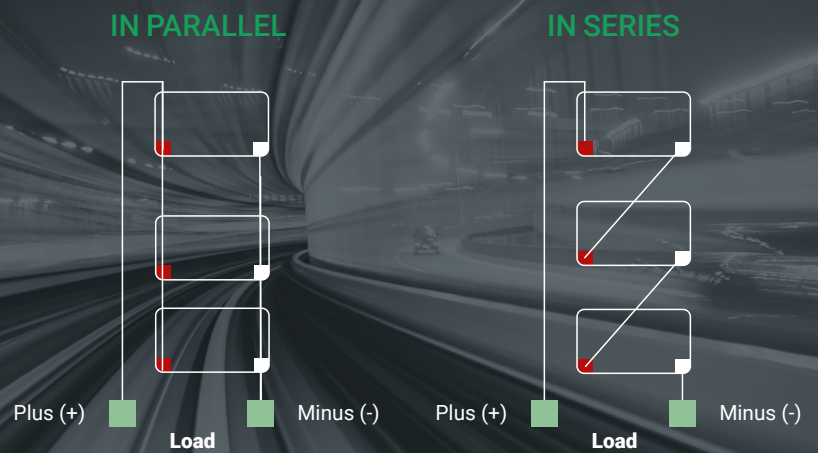



TAB d.d., POLENA 6, SI-2392 MEŽICA, SLOVENIA, e: info@tab.si, w: www.tab.si, t: +386 2 87 02 300, f: +386 2 87 02 305

TAB MAK DOOEL Probištip
 MAKEDONSKI REVOLUCIONERI 50
 2210 PROBISHTIP
 NORTH MACEDONIA
 e: info@tab-mak.mk
 w: www.tab-mak.mk
 t: +389 3 24 81 501
 f: +389 3 24 81 502

TAB POLSKA Sp. z o.o.
 UL. POPREZECZNA 15
 05 083 WIERZBIN
 POLAND
 e: buiro@tab-polska.pl
 w: www.tab-polska.pl
 t: +48 22 666 15 67
 f: +48 22 666 16 02


BATERIJA-TAB HRVATSKA d.o.o.
 DUGOSELKA 102
 1360 SESVETE
 CROATIA
 e: ured@baterija.hr
 w: www.baterija.hr
 t: +385 1 233 9 233
 f: +385 1 233 0 737

TAB ITALIA S.P.A.
 VIA XXV APRILE 1945, N. 8
 24050 ZANICA (BG)
 ITALY
 e: info@tabitalia.com
 w: www.tabitalia.com
 t: +39 0363 60528
 f: +39 0363 62692

TAB BATERIJE d.o.o.
 ZEMUNSKA 301
 11277 UGRINOVCI
 SERBIA
 e: office@tabbaterije.rs
 w: www.tabbaterije.rs
 t: +381 11 377 4452
 f: +381 11 377 4452

TAB SPAIN S.L.
 C / LAGASVA, 26 1- DERECHA
 28001 MADRID
 SPAIN
 e: info@tabspain.com
 w: www.tabspain.com
 t: +34 910 880 066
 f: +34 910 880 033

PURE ENERGY, MAXIMUM POWER

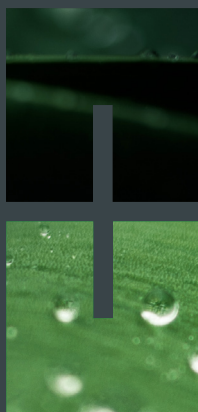

TAB tovarna akumulatorskih baterij, d.d. Polena 6, SI-2392 Mezica, Slovenia
Tel: +386 2 87 02 300 Web: www.tab.si E-mail: info@tab.si

TAB 
Li-Ion batteries